


High-Temperature LCF Grips

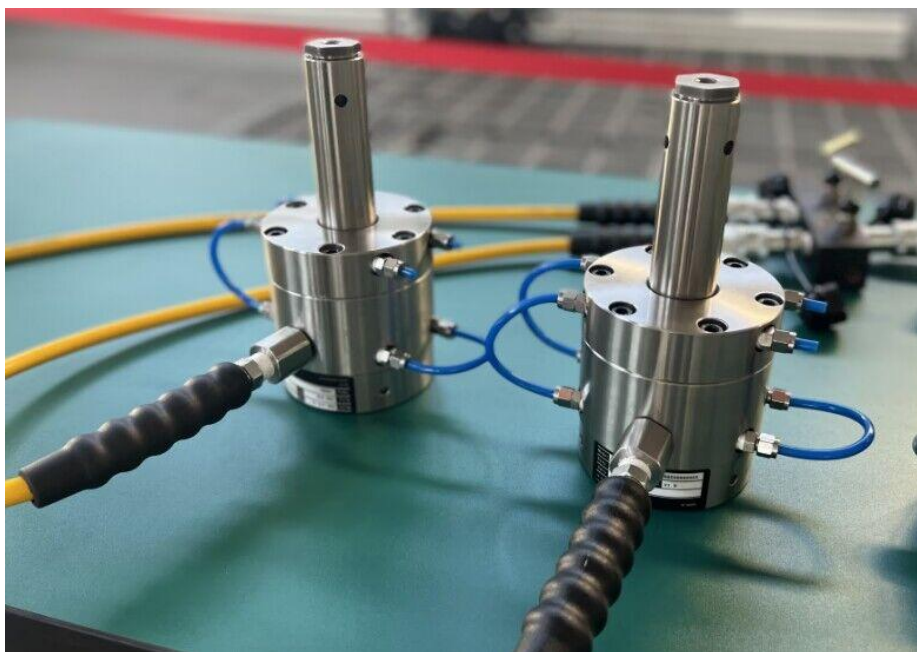

Picture just for reference

Application:

High-Temperature Grips were expressly designed for high-temperature, low-cycle fatigue testing, but can also be used for other types of tension-compression or tension-only testing. The grip heads and extension rods are constructed of high-temperature, super alloys selected to extend into the heated zone of the furnace, minimizing the thermal gradients within the specimen. Accessories for these grips include a hand pump (required), your choice of buttonhead or threaded specimen adapters, and a water cooling kit.

Specifications:

Load:100kN:

Temperature:700°C/ 1000°C

Accessories:

Hand Pump (Required)

Water Cooling Kit, with flow switches

Replacement Seal Kit

Specimen Adapters

Specimen Adapters (include 1 set, Choose the size as required)		
M12 X 1.75MM-6H	DZ22	
M16 X 2MM-6H	DZ22	
M14 X 1.5-6H	DZ22	
M6 X 1MM-6H	DZ22	
M16 X 1.25MM-6H	DZ22	
M8 X 1.25-6H	DZ22	
M10 X 1.50MM-6H	DZ22	
M14 X 2MM-6H	DZ22	
M16 X 1MM-6H	DZ22	
M13 X 1.5MM-6H	DZ22	
M12 X 1.25MM-6H	DZ22	
M10 X 1.25MM-6H	DZ22	
M12 X 1.00MM-6H	DZ22	
M14 X 1.00MM-6H	DZ22	
M10 X 1.00MM-6H	DZ22	
	M12 X 1.00MM-6H	DZ22

HST GROUP Co., LTD.

NO. 4915, West Jingshi Road, Jinan 250012, PR CHINA.

Tel: +86-159 1008 1986

www.hssdgroup.com - e-mail: admin@hssdtest.com