


HST- EIT60 Rubber Rebound Resilience Elasticity Impact Tester

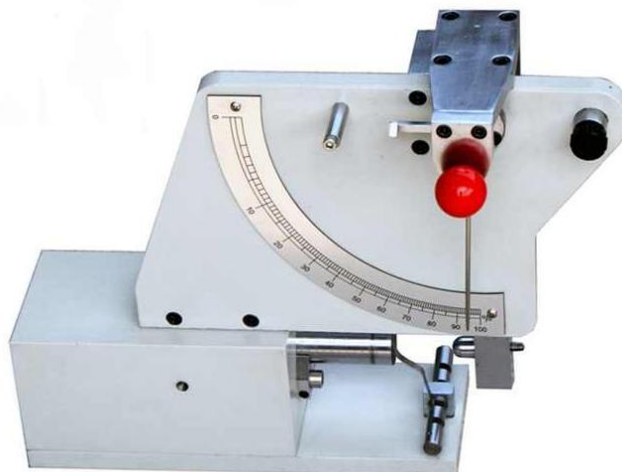

Picture Just for reference

Application

Rebound Resilience Elasticity Tester is used for determining the rebound resilience of rubber the hardness of which lies between 30IRHD~85IRHD. The resilience elasticity is defined as the ratio of the regained energy in relation to the applied energy. This ratio of energy corresponds with the quotient of the height of the resilience and the height of the drop of the pendulum. It completely conforms to.

To meet the standards:

In line with GB / T 1681 "Determination of vulcanized rubber elasticity" and the requirements of ISO4662 standards.

Technical parameter:

Instruction Range	0~100%
Marking scale	1%
Adjustable range of specimen thickness	0~60mm
Scale mark	1mm
Measuring elastic feeding device test	Flexible test material measuring device (in line with

	DIN53512 and ISO4662 specifications)
Dimension	62*12*33cm
Weight	38k

HST GROUP Co., LTD.

NO. 4915, West Jingshi Road, Jinan 250012, PR CHINA.

Tel: +86-159 1008 1986

www.hssdgroup.com - e-mail: admin@hssdtest.com